

# RT 系列 Series

## 特点 Features


- 耐高纹波电流，高频超低阻抗。  
High ripple current, Extremely Low impedance at high frequency.
- 105°C, 4000~10000小时寿命。  
High reliability withstanding 10000 hours load life at 105°C  
(4000~10000 hours for smaller case size as specified bellow)
- 符合RoHS指令。  
Complied to the RoHS directive.



## 主要技术性能 Specifications

项目 Items	特性 Performance Characteristics																		
使用温度范围 Operating Temperature Range	-40~+105°C																		
额定电压范围 Rated Voltage Range	6.3~100V																		
标称容量范围 Nominal Capacitance Range	0.47~15000μF																		
标称容量允许偏差 Capacitance Tolerance	± 20% (120Hz, +20°C)																		
漏电流 Leakage Current	$I \leq 0.01CV$ (μA) or 3μA, 取较大值 2分钟(at 20°C, after 2 minutes, whichever is greater)																		
损耗角正切值 (tgδ) Dissipation Factor (+20°C, 120Hz)	<table border="1"> <tr> <td><math>U_r</math> (V)</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> <td>63</td> <td>100</td> </tr> <tr> <td>tgδ</td> <td>0.22</td> <td>0.19</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> <td>0.10</td> <td>0.09</td> <td>0.08</td> </tr> </table> <p>容量大于1000μF者，每增加1000μF，其损耗角正切值增加0.02 When nominal capacitance exceeds 1000μF, add 0.02 to the value above for each 1000μF increase.</p>	$U_r$ (V)	6.3	10	16	25	35	50	63	100	tgδ	0.22	0.19	0.16	0.14	0.12	0.10	0.09	0.08
$U_r$ (V)	6.3	10	16	25	35	50	63	100											
tgδ	0.22	0.19	0.16	0.14	0.12	0.10	0.09	0.08											
温度特性 Temperature Characteristics (Impedance ratio at 120Hz)	<table border="1"> <tr> <td><math>U_r</math> (V)</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25~100</td> </tr> <tr> <td>Z-25°C / Z+20°C</td> <td>4</td> <td>3</td> <td>2</td> <td>2</td> </tr> <tr> <td>Z-40°C / Z+20°C</td> <td>8</td> <td>6</td> <td>4</td> <td>3</td> </tr> </table>	$U_r$ (V)	6.3	10	16	25~100	Z-25°C / Z+20°C	4	3	2	2	Z-40°C / Z+20°C	8	6	4	3			
$U_r$ (V)	6.3	10	16	25~100															
Z-25°C / Z+20°C	4	3	2	2															
Z-40°C / Z+20°C	8	6	4	3															
耐久性 Load Life	<table border="1"> <tr> <td>ΦD</td> <td>Φ5, 6.3</td> <td>Φ8, 10</td> <td>≥Φ12.5</td> </tr> <tr> <td>6.3~10(V)</td> <td>4,000 hours</td> <td>6,000 hours</td> <td>8,000 hours</td> </tr> <tr> <td>16~100(V)</td> <td>5,000 hours</td> <td>7,000 hours</td> <td>10,000 hours</td> </tr> </table> <p>+105°C加额定电压，恢复16小时后： After applying rated voltage at +105°C and then resumed for 16 hours: 容量变化率 Capacitance change : ±25%初始测量值以内 ±25% of the initial measured value 漏电流 Leakage current : ≤初始规定值 ≤The initial specified value 损耗角正切值 Dissipation factor : ≤2倍初始规定值 ≤2times of the initial specified value</p>	ΦD	Φ5, 6.3	Φ8, 10	≥Φ12.5	6.3~10(V)	4,000 hours	6,000 hours	8,000 hours	16~100(V)	5,000 hours	7,000 hours	10,000 hours						
ΦD	Φ5, 6.3	Φ8, 10	≥Φ12.5																
6.3~10(V)	4,000 hours	6,000 hours	8,000 hours																
16~100(V)	5,000 hours	7,000 hours	10,000 hours																
高温贮存 Shelf Life	<p>+105°C, 1000小时贮存后，恢复16小时后： After storage for 1000 hours at +105°C and then resumed for 16 hours: 容量变化率 Capacitance change : ±25%初始测量值以内 ±25% of the initial measured value 漏电流 Leakage current : ≤2倍初始规定值 ≤2times of the initial specified value 损耗角正切值 Dissipation factor : ≤2倍初始规定值 ≤2times of the initial specified value</p>																		

## 外形图及尺寸表 Case Size Table

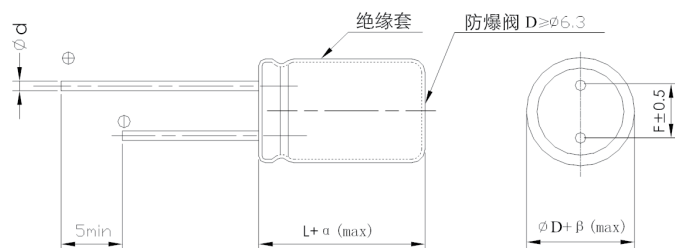

单位 Unit: mm

D	5	6.3	8	10	12.5	16	18
F	2.0	2.5	3.5	5.0	5.0	7.5	7.5
d	0.5		0.5, 0.6		0.6		0.8

αMAX	< L < 20 > 1.5
	< L ≥ 20 > 2.0

βMAX	< D < 20 > 0.5
	< D ≥ 20 > 1.0

## 频率修正系数 Frequency Coefficient

Freq.(Hz)	120	1K	10K	100K
CAP(μF)				
~180	0.40	0.75	0.90	1.00
220~560	0.50	0.85	0.94	1.00
680~1800	0.60	0.87	0.95	1.00
2200~3900	0.75	0.90	0.95	1.00
4700~15000	0.85	0.95	0.98	1.00

目录中记载的内容可能未经提示而变更。贵司在购买时请要求提供承诺书，并以此为准使用。

The contents recorded in the catalogue might be changed without any reminder. Please ask for providing the datasheet and take it as standard when purchasing.



## 尺寸 Dimensions

CAP(μF) \ WV		6.3V(0J)			10V(1A)			16V(1C)			25V(1E)		
		Size	ESR	Ripple	Size	ESR	Ripple	Size	ESR	Ripple	Size	ESR	Ripple
10	100										5×11	1.20	120
22	220										5×11	1.00	130
33	330										5×11	0.90	150
47	470							5×11	0.58	210	5×11	0.58	210
100	101	5×11	0.58	210	5×11	0.58	210	6.3×11	0.22	340	6.3×11	0.22	350
220	221	6.3×11	0.26	290	6.3×11	0.32	340	8×11.5	0.13	510	8×11.5	0.15	640
330	331	6.3×11	0.21	340	6.3×11	0.20	380	8×11.5	0.10	640	8×16	0.087	840
470	471	8×11.5	0.14	400	8×11.5	0.20	640	8×16	0.087	840	8×20	0.069	1050
								10×12.5	0.080	865	10×16	0.060	1210
680	681	8×11.5	0.13	640	8×16	0.085	840	8×20	0.060	1050	10×20	0.046	1400
								10×16	0.046	1150			
820	821	8×11.5	0.10	720									
1000	102	8×16	0.08	850	8×20	0.069	1050	10×20	0.046	1400	12.5×20	0.035	1900
		10×12.5	0.08	870	10×16	0.060	1210						
1200	122	8×20	0.069	1050									
		10×16	0.064	1200									
1500	152	10×20	0.050	1380	10×25	0.042	1650	12.5×20	0.035	1900	12.5×25	0.027	2230
2200	222	10×25	0.042	1650	12.5×20	0.035	1900	12.5×25	0.027	2230	16×25	0.025	2780
3300	332	12.5×20	0.035	1900	12.5×25	0.030	2125	16×25	0.025	2420	16×30	0.020	2920
4700	472	12.5×25	0.030	2200	16×25	0.025	2400	16×30	0.020	2920	18×35	0.018	3520
6800	682	16×25	0.025	2400	16×30	0.020	2920	18×35	0.018	3520			
10000	103	16×30	0.020	2920	18×35	0.018	3520						
15000	153	16×30	0.020	2920									

CAP(μF) \ WV		35V(1V)			50V(1H)			63V(1J)			100V(2A)		
		Size	ESR	Ripple	Size	ESR	Ripple	Size	ESR	Ripple	Size	ESR	Ripple
0.47	R47				5×11	5.50	20				5×11	6.00	15
1	010				5×11	3.00	45				5×11	4.50	20
2.2	2R2				5×11	2.50	60				5×11	3.00	30
3.3	3R3				5×11	2.20	65				5×11	2.70	40
4.7	4R7	5×11	1.50	40	5×11	1.90	100				5×11	2.50	65
6.8	6R8										5×11	1.80	105
10	100				5×11	1.50	130	5×11	1.50	105	6.3×11	1.20	140
15	150										6.3×11	1.00	140
22	220				5×11	0.70	200	6.3×11	0.96	200	8×11.5	0.70	210
33	330	5×11	0.58	210	6.3×11	0.60	280	6.3×11	0.96	200	10×12.5	0.50	240
47	470	6.3×11	0.22	340	6.3×11	0.38	290	8×11.5	0.40	360	10×12.5	0.34	400
68	680							8×11.5	0.30	420	10×16	0.30	460
100	101	8×11.5	0.16	460	8×11.5	0.16	600	10×12.5	0.10	685	10×25	0.16	800
											12.5×20	0.18	820
220	221	8×16	0.087	900	10×16	0.084	1050	10×25	0.08	1100	16×20	0.073	1100
		10×12.5	0.080	910									
270	271	8×20	0.069	1000									
330	331	10×16	0.060	1210	10×25	0.055	1480	12.5×20	0.075	1100	16×25	0.070	1300
470	471	10×20	0.046	1400	12.5×20	0.045	1670	12.5×30	0.060	1800			
560	561	10×25	0.042	1650									
680	681	12.5×20	0.035	1900				16×25	0.050	2000			
820	821							18×25	0.048	2200			
1000	102	12.5×25	0.027	2130	16×25	0.025	2410	16×35	0.040	2500			
1200	122							18×30	0.030	2600			
2200	222	16×30	0.025	2610	18×35	0.022	3180						
3300	332	18×35	0.020	3200									

Size φD×L(mm)

Maximum Allowable Ripple Current (mA rms) at 105°C 100KHz

Maximum ESR (Ω) at 20°C 100KHz